

Product Description

Kanales UGR Light refers to a specialized lighting fixture designed to minimize glare and enhance visual comfort in indoor spaces, particularly in environments where precise lighting conditions are crucial, such as offices, schools, and healthcare facilities. These fixtures are engineered to achieve low Unified Glare Rating (UGR), a measurement indicating reduced discomfort caused by glare. Kanales UGR Light fixtures typically feature advanced optics and design elements that distribute light evenly and efficiently, ensuring optimal illumination without compromising on visual clarity or comfort for occupants.

Lamp

Light Source	: OSRAM
CRI	: >85
Rated Life	: 50,000 HRs
Wattage	: 35W 40W 45W 50W 70 W
Beam Angle	: Sharp narrow wide flat asymmetric double asymmetric
CCT	: 3000K 4000K 5000K 6500K

Body

Color	: White Black
Material	: Aluminum
Length (L)	: 1500 mm
Width (W)	: 70 mm
Height (H)	: 76 mm

Electric

Control Gear	: TRIDONIC OSRAM
Input Voltage	: 220 - 240V/50-60Hz
Luminaire Efficacy	: 180 lm/w
Output Current	: Constant Current
Output Voltage	: SELV


Other

Protection	: IP40
------------	--------

Options

Dimmable Options	: 0/1 - 10V Dali wireless Sensor
------------------	--------------------------------------

Different Diffuser For Different Distribution

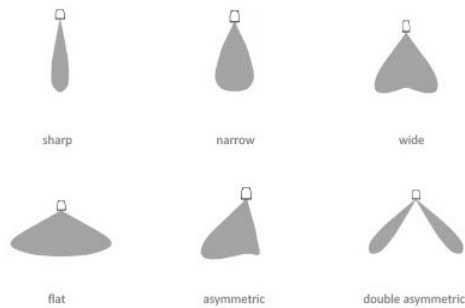

Accessories

POWER FEED IN



Feed In Box



Feed In Connector

MODNTING KIT



Suspension Chain



Suspension Rod



Suspension Cord



Surface Mounted

NODE CONNECTOR



L Node Connector



T Node Connector



X Node Connector

CLOSURE



End Cap



Blank Cover

Hypermarket | Supermarket | Retail stores | Showroom | warehouse

