


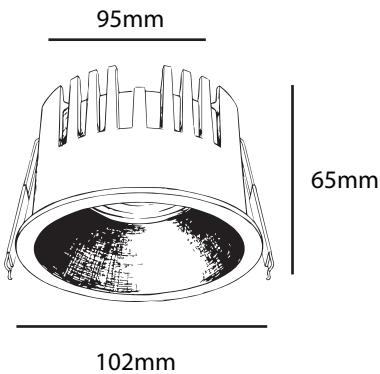

Product Description

Cosmo Recessed architectural downlight designed to deliver both high performance and exceptional versatility for sophisticated indoor spaces. Engineered with a high-efficiency CREE LED chip and an aluminum die-cast body, the fixture operates at 20W to produce a powerful 2300 lumens with an impressive efficacy of 115 lm/W. To accommodate various design requirements, we provide multiple beam angles ranging from a narrow 15° to a wide 55°, alongside flexible color temperatures spanning 2700K to 6000K. The luminaire ensures superior visual comfort and vibrant color rendering with a CRI greater than 90, backed by a robust rated life of 30,000 hours.

Light

Light Source	: CREE LED
CRI	: >90
Wattage	: 20W
Beam Angle	: 15° 24° 36° 55°
Color Temperature	: 2700K 3000K 3500K 4000K 5000K 6000K
Rated Life	: 30,000 Hrs.

Body

Finish	: White
Material	: Die Cast Aluminium
Diameter (mm)	: 102mm
Cutout (mm)	: 95 mm
Height (mm)	: 65 mm

Electric

Voltage	: AC 220-240V
Fixture Lumen	: 2300lm
Luminaire Efficacy	: 115Lm/W

More informations

Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP65
Installation Type	: Recessed

COSMO

Recessed Downlight

Lightronic®

