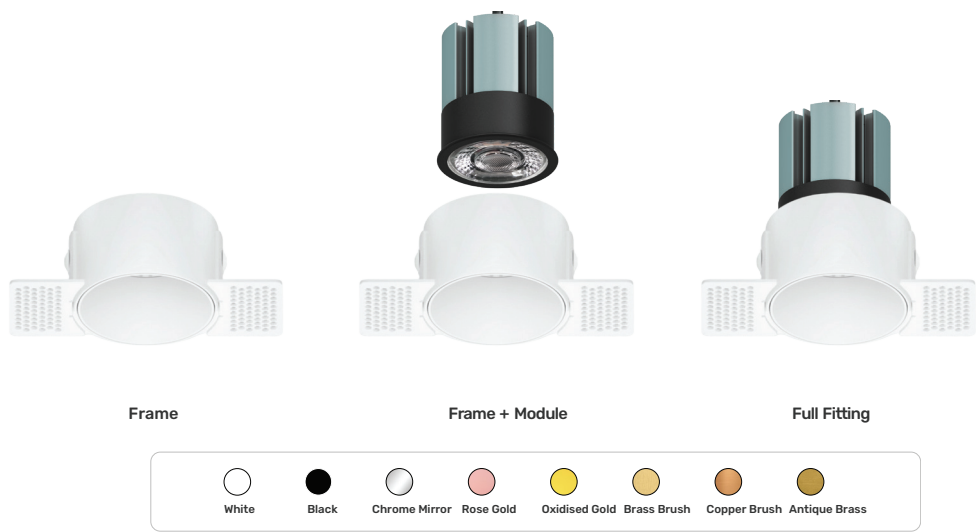


Product Description

Engineered for versatile architectural illumination, this compact LED luminaire features a durable aluminum body available in sleek black, white, or custom finishes. Powered by high-efficiency Luminus LEDs with a color rendering index exceeding 90 (CRI >90), we offer exceptional color accuracy across multiple CCT options ranging from 2700K to 6000K. The fixture delivers customizable performance with power options of 6W, 8W, and 13W, producing an output range from 320 Lm to 1050 Lm with an efficacy of 80 Lm/W. Designed for precise lighting control, it supports versatile beam angles (15°, 24°, 38°, 60°) and integrates seamlessly with Triac, 0-10V, or DALI dimming protocols. Built with an IP20 rating and a 36VDC operating voltage, it ensures reliable long-term performance with a rated service life of 30,000 hours.

Light

Light Source	: 
CRI	: >90
Wattage	: 6W 8W 13W
Beam Angle	: 15° 24° 38° 60°
Color Temperature	: 2700K 3000K 4000K
	: 5000K 6000K
Rated Life	: 30,000 Hrs.

Body

Finish	: White Black Custom
Material	: Aluminium
Diameter (mm)	: 65mm
Cutout (mm)	: 70mm
Length (mm)	: 120mm
Height (mm)	: 55mm 95mm 105mm

Electric

Voltage	: 36VDC
Luminaire Efficacy	: 80Lm/W
Fixture Lumen Range	: 320Lm-1050Lm
Drive Current 6W	: 140mA
Drive Current 8W	: 180mA
Drive Current 13W	: 300mA

More informations

Operating Temperature	: -20°C ~ 40°C
Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP20

