


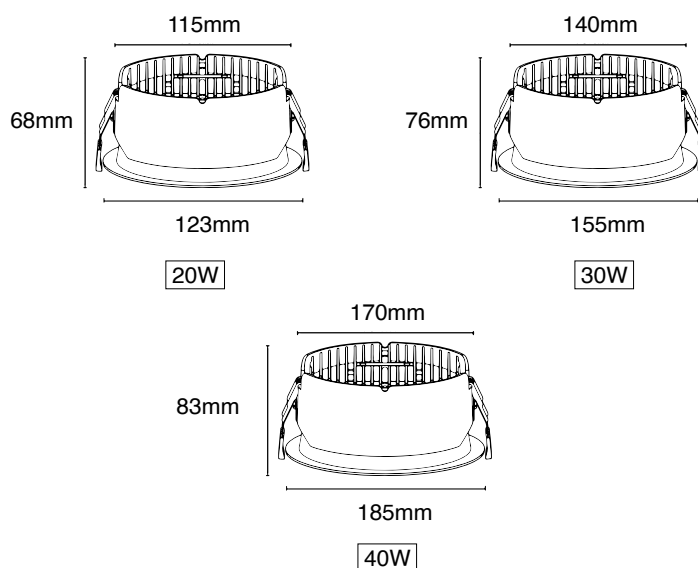

Product Description

This recessed architectural luminaire is powered by a high-efficiency CREE LED source, delivering 1150 lm output with an efficacy of 115 lm/W at AC 220-240V. Designed with a superior color rendering index (CRI >90) and a 60° beam angle, it offers power options of 20W, 30W, or 40W alongside correlated color temperatures ranging from 2700K to 6000K. The durable aluminum fixture features an IP54 ingress protection rating and comes in standard white or black finishes across three compact structural size variants. For versatile control integration, the fitting supports Triac, 0-10V, and DALI dimming protocols. Standard installation dimensions include body diameters from 123 mm to 185 mm, cutout sizes from 115 mm to 170 mm, and profile heights from 68 mm to 83 mm.

Light

Light Source	: CREE LED
CRI	: >90
Wattage	: 20W 30W 40W
Beam Angle	: 60°
Color Temperature	: 2700K 3000K 4000K 5000K
	: 6000K

Body

Finish	: White Black
Material	: Aluminium
Diameter (mm)	: 123mm 155mm 185mm
Cutout (mm)	: 115 mm 140mm 170mm
Height (mm)	: 68 mm 76mm 83mm

Electric

Input Voltage	: AC 220-240V
Fixture Lumen	: 1150lm
Luminaire Efficacy	: 115Lm/W

More informations

Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP54
Installation Type	: Recessed

