
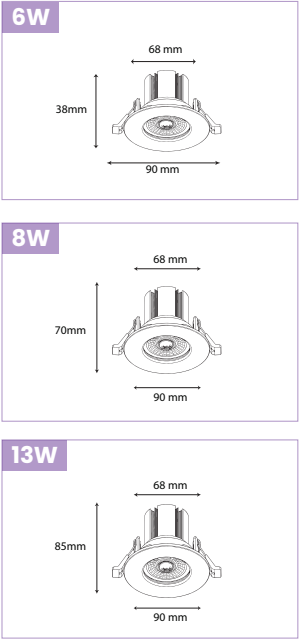


IP65 Non-Tiltable

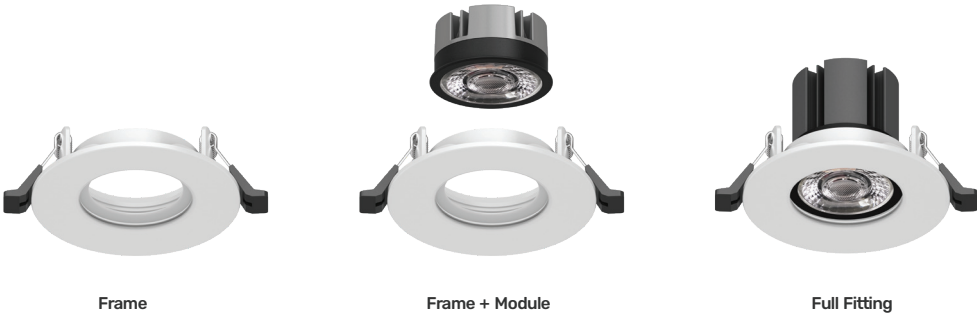

Product Description

This luminaire is powered by a high-efficiency Luminus LED light source with a CRI >90, delivering a fixture output range of 320lm to 1050lm across 6W, 8W, and 13W options. It features versatile beam angles (15°, 24°, 38°, 60°) and color temperatures spanning from 2700K to 6000K to suit diverse illumination requirements. Constructed from aluminium with a 90mm diameter, 68mm cutout, and height options up to 85mm, the fixture is available in White, Black, or Silver finishes. Powered at 36VDC with an efficacy of 80lm/W, it offers control capabilities through Triac, 0-10V, and DALI dimming options. Designed for interior applications with an IP20 rating and operating temperature range of -20°C to 40°C, it ensures reliability with a rated lifespan of 30,000 hours.

Light

Light Source	: 
CRI	: >90
Wattage	: 6W 8W 13W
Beam Angle	: 15° 24° 38° 60°
Color Temperature	: 2700K 3000K 4000K
	5000K 6000K
Rated Life	: 30,000 Hrs.

Body

Finish	: White Black Silver
Material	: Aluminium
Diameter (mm)	: 90mm
Cutout (mm)	: 68mm
Height (mm)	: 38mm 70mm 85mm

Electric

Voltage	: 36VDC
Luminaire Efficacy	: 80Lm/W
Fixture Lumen Range	: 320Lm-1050Lm
Drive Current 6W	: 140mA
Drive Current 8W	: 180mA
Drive Current 13W	: 300mA

More informations

Operating Temperature	: -20°C ~ 40°C
Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP65

SEETO RD.

Spotlight

Lightronic®

IP65

Non-Tiltable

