


IP65

Non-Tiltable

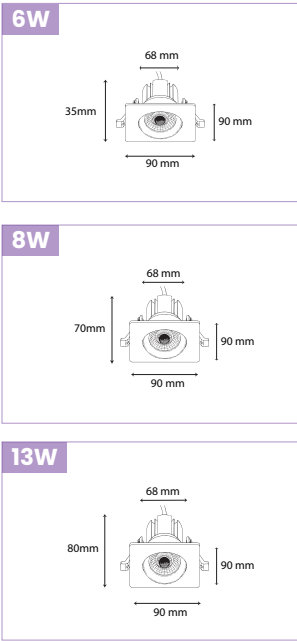

Product Description

Powered by a high-efficiency Luminus light source, this luminaire offers selectable power configurations of 6W, 8W, and 13W, delivering an efficacy of 80 Lm/W across a fixture output range of 320 Lm to 1050 Lm. It provides precise visual performance with a high color rendering index of CRI >90, color temperatures spanning 2700K to 6000K, and selectable beam angles of 15°, 24°, 38°, and 60°. Built from durable aluminum, the body is available in white, black, or silver finishes, featuring a 90mm width, a 68mm cutout diameter, and profile heights of 35mm, 70mm, or 80mm. Operating on a 36VDC input voltage, the unit supports seamless system integration with Triac, 0-10V, and DALI dimming protocols. Rated for indoor operation with an IP20 ingress protection rating and an ambient operating range of -20°C to 40°C, the fixture delivers a lifetime of 30,000 hours.

Light

Light Source	: 
CRI	: >90
Wattage	: 6W 8W 13W
Beam Angle	: 15° 24° 38° 60°
Color Temperature	: 2700K 3000K 4000K
	: 5000K 6000K
Rated Life	: 30,000 Hrs.

Body

Finish	: White Black Silver
Material	: Aluminium
Width (mm)	: 90mm
Cutout (mm)	: 68mm
Height (mm)	: 35mm 70mm 80mm

Electric

Voltage	: 36VDC
Luminaire Efficacy	: 80Lm/W
Fixture Lumen Range	: 320Lm-1050Lm
Drive Current 6W	: 140mA
Drive Current 8W	: 180mA
Drive Current 13W	: 300mA

More informations

Operating Temperature	: -20°C ~ 40°C
Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP65

SEETO SQ.

Spotlight

Lightronic®

IP65

Non-Tiltable

