



Product Description

This compact 13W LED fixture features a durable aluminum body measuring 50mm in diameter with a 46mm cutout, delivering an output between 950 and 1050 lumens at an efficacy of 80 Lm/W. Designed with high color rendering (CRI >90), it ensures accurate color rendition across color temperatures of 2700K,3000K,3500K,4000K,5000K and 6000K. To suit diverse architectural requirements, the light offers versatile beam angle options of 15°, 24°, 38°, and 60°. Operating on 36V DC at 300mA, it supports seamless integration with Triac, 0-10V, and DALI dimming systems. Finished in Grey ,Steel Grey this IP20-rated luminaire provides a reliable service life of up to 30,000 hours.

Light

Light Source	: 
CRI	: >90
Wattage	: 13W
Beam Angle	: 15° 24° 38° 60°
Color Temperature	: 2700K 3000K 3500K 4000K 5000K 6000K
Rated Life	: 30,000 Hrs.

Body

Finish	: Grey Steel Grey
Material	: Aluminium
Diameter (mm)	: 50mm
Height (mm)	: 65mm
Cutout (mm)	: 46mm


Electric

Voltage	: 36V DC
Luminaire Efficacy	: 80Lm/W
Fixture Lumen Range	: 950-1050Lm
Drive Current	: 300mA

More informations

Operating Temperature	: -20°C ~ 40°C
Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP20

DIMENSION

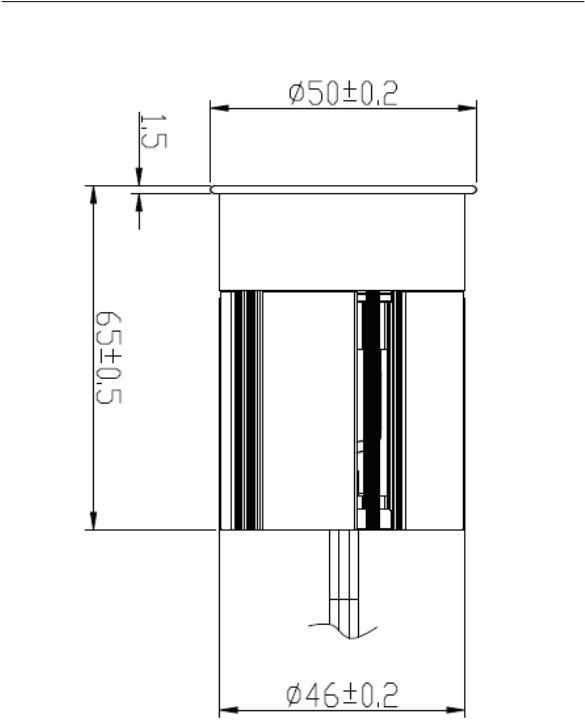

LUMEN

CCT (K)	Lumen Output		
	13W	8W	6W
Dim-to-warm (with 13W LED)	880	480	320
2700K	950	570	430
3000K	1000	600	450
4000K	1050	630	470