

IP65

5M

2835 LEDs

360°

DIMMABLE



Product Description

The 360° Neon Light delivers uniform, shadow-free illumination across its entire surface with full 360° light distribution. Encased in a dust-resistant matte silicone finish, this highly flexible 24V light strip can be bent freely for versatile designs. Rated IP65, it is UV, salt, alkali, and flame resistant, ensuring superior durability for diverse indoor and outdoor architectural applications.

LED

Wattage	: 14W/M
CRI	: >90
CCT	: 2700K 3000K 4000K 6000K
LED Qty	: 280 LEDs/M

Dimensions

Diameter	: 23mm
Length / Reel	: 5000mm
Cutting Length	: Free Cutting

Electric

Voltage	: DC 24V
Voltage Range	: DC 23 - 25V
Reverse Voltage	: DC 25 V


Lumens Per Meter

2700K	: 950lm
3000K	: 990lm
4000K	: 1000lm
6000K	: 1000lm

Other

Bend Type	: 360°
Protection	: IP 65
Dimmable Option	: Triac I0/1 - 10V Dali Wireless

DIMENSION

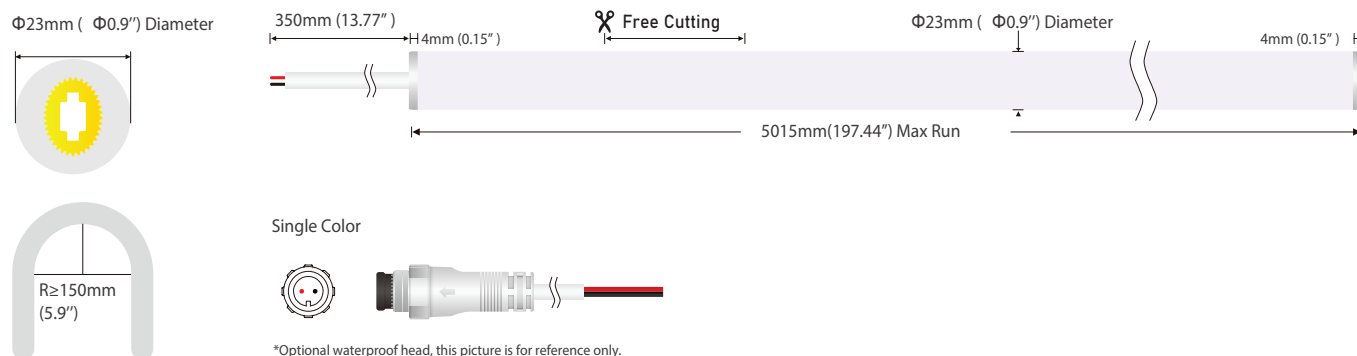


ACCESORIES




LIGHT DISTRIBUTION


LUMINOUS INTENSITY
DISTRIBUTION DIAGRAM

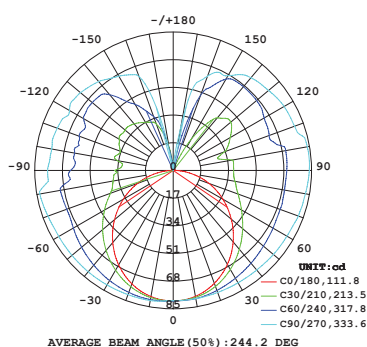

C0 PLANE ISOLUX
DIAGRAM (UNIT:lx)

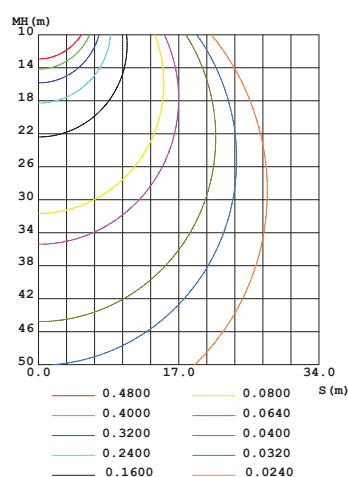


POWER CONNECTION DIAGRAM

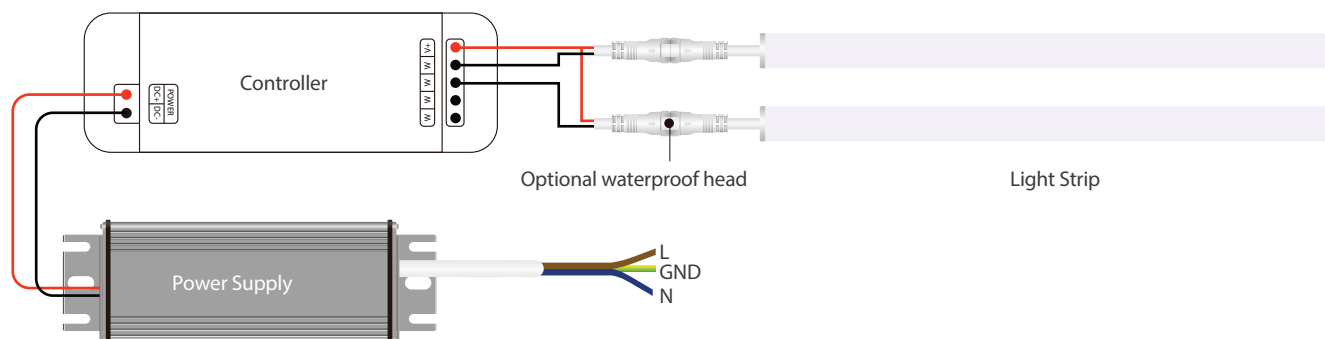

INSTRUCTIONS

① Clip


Fix the clips and profile via the screws.

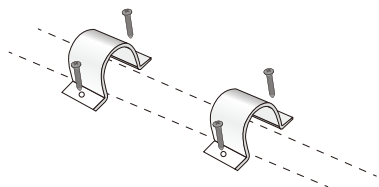

⚠ Suggestion: 2pcs clips per meter.

② Neon Series

Simultaneously install the neon from both ends.

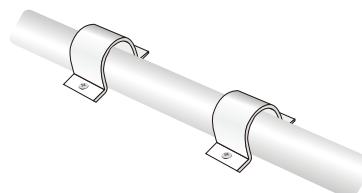


① Cutting

Cut the of 360° Series, expose the soldering pad.




② Install cap

Apply gel around the tail of 360° Series and install the cap.

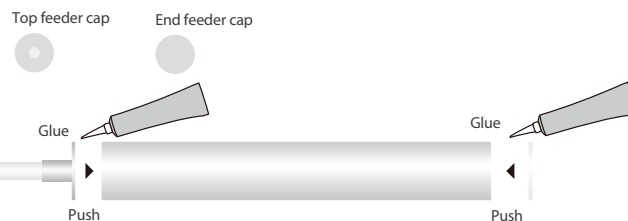


Attention

No Trampling

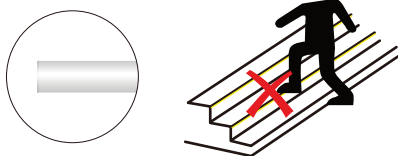

No Stretching

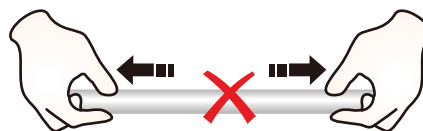

360° NEON

Flexible Round Neon Light

