


IP67

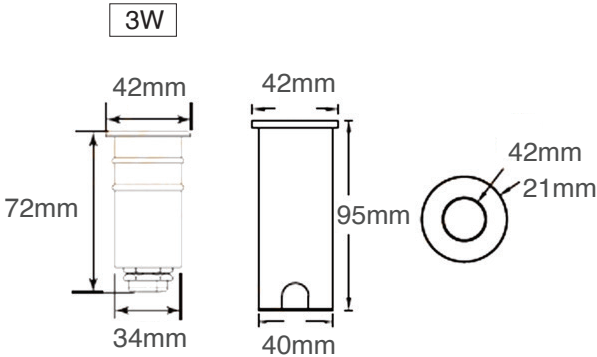

Product Description

This compact 3W LED luminaire delivers precise illumination with a 24° beam angle and an efficacy of 80 Lm/W across color temperatures ranging from 2700K to 5000K. Built for durability, the fixture features die-cast 6063 aluminum housing with stainless steel hardware, silicone gasketing, and a silver and black finish. It is equipped with clear or frosted tempered glass lenses, achieving an IP67 ingress protection rating and IK08 impact resistance for demanding environments. Operating on either 24VDC or 100-240V AC power, it offers standard on/off control and an operational lifespan of 50,000 hours. The housing measures 42mm in diameter with a body length of 72mm (95mm with cap) and requires a cutout diameter of 34mm (40mm with cap).

Light

Light Source	: LED
CRI	: 80
Wattage	: 3W
Beam Angle	: 24°
Color Temperature	: 2700K 3000K 4000K 5000K
Rated Life	: 50,000 Hrs.

Body

Finish	: Silver & Black
Housing Material	: Die Caste Aluminium 6063
Lens Material	: Clear or Frosted Tempered Glass
Hardware Material	: Stailness steel
Gasket Material	: Silicone

Diameter (mm)	: 42mm
Cutout without Cap	: 34mm
Cutout with Cap	: 40mm
Length without Cap	: 72mm
Length with Cap	: 95mm

Electric

Voltage	: 24VDC 100-240V AC
Fixture Lumen Range	: 120Lm-1700Lm
Luminaire Efficacy	: 80Lm/W

More informations

Control	: On/off
Ingress Protection	: IP67
Impact Resistance	: IK08

IP67

PANEL OPTIONS

Round Panel



Frosted Glass Panel



Polarized Panel



360°Polarized Panel



Square Panel

