


IP20

Tiltable

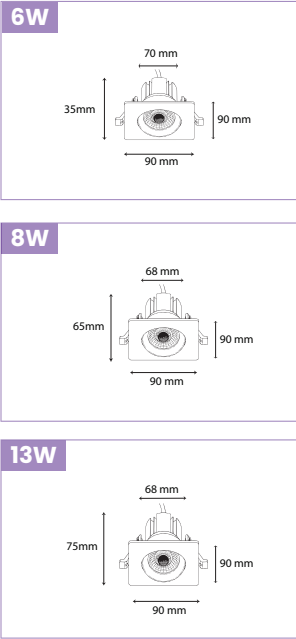

Product Description

This high-performance LED spotlight featuring an exceptional Color Rendering Index (CRI) of over 90 for superior color accuracy. This versatile fixture is engineered with wattages of 6W, 8W, and 13W, delivering a flexible lumen output ranging from 480Lm up to 1050Lm. To ensure ideal optical distribution, the luminaire features a precise 38° beam angle and comes in a choice of 2700K, 3000K, or 4000K color temperatures. The durable aluminium housing is finished in minimalist white, black, or silver, maintaining a clean 90mm width and a 68mm cutout size. Operating smoothly on AC 220-240V with an IP20 ingress protection rating, it boasts a long-rated life of 30,000 hours and offers advanced Triac, 0-10V, or DALI dimming control.

Light

Light Source	: LED
CRI	: >90
Wattage	: 6W 8W 13W
Beam Angle	: 38°
Color Temperature	: 2700K 3000K 4000K
Rated Life	: 30,000 Hrs.

Body

Finish	: White Black Silver
Material	: Aluminium
Width (mm)	: 90mm
Cutout (mm)	: 68mm
Height (mm)	: 35mm 65mm 75mm

Electric

Voltage	: AC 220-240V
Fixture Lumen Range	: 480Lm-1050Lm
Luminaire Efficacy	: 80Lm/W

More informations

Dimming Option	: Triac 0-10V Dali
Ingress Protection	: IP20

SEETO SQ.

Spotlight

Lightronic®

IP20

Tiltable

